

Vibrabsorber **MEDIUM SERIES**




Spring mount is necessary in all machinery, which, by virtue of its design, has reciprocating or rotating parts, creates vibration to some degree through the imbalance of the moving parts.

This vibration produced by a machine leads to different problems, such as a reduction in the machine's useful life through part wear, plus the transmission of this vibration to other non-insulated adjacent structures, giving rise to problems of noise and vibration transmission. It is therefore important to install a spring mount to machinery.



Vibrabsorber MEDIUM SERIES

DRAWINGS

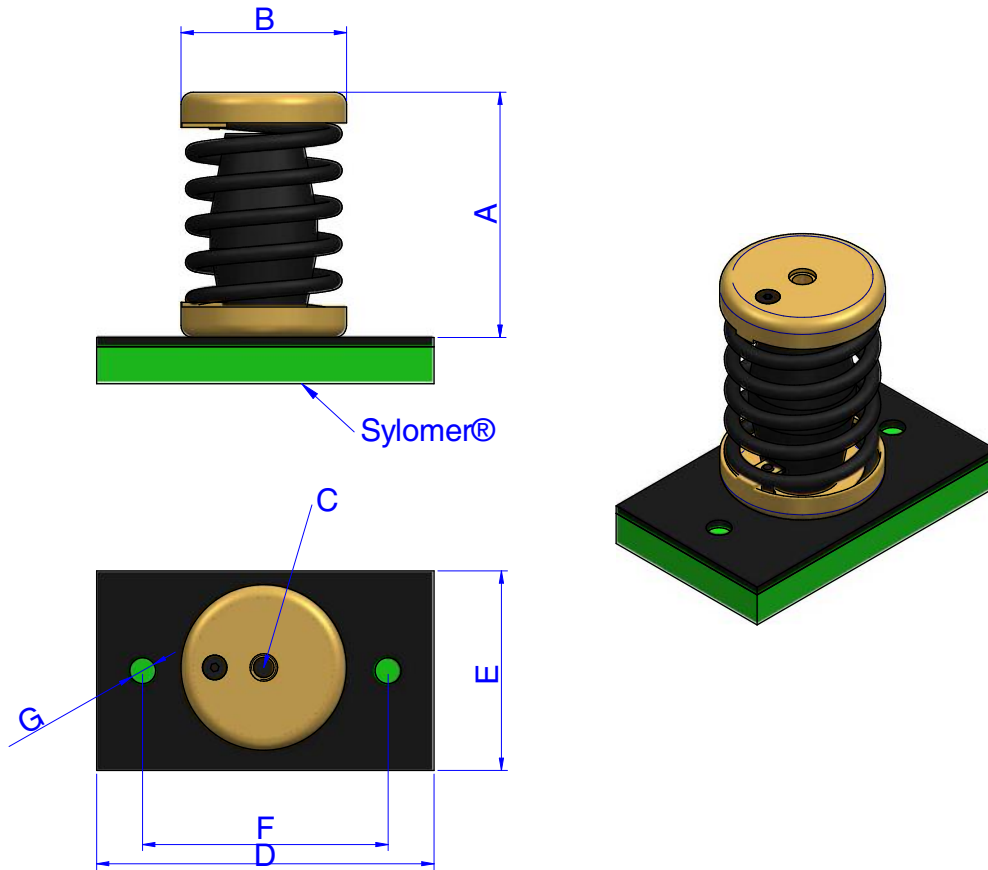


DIMENSIONS

Type	A (mm.)	B (mm.)	Spring color	C (mm.)	D (mm.)	E (mm.)	F (mm.)	Code
AMC 25	80	54	BLACK	M-8	0	0	0	20101
AMC 50	80	54	BLUE	M-8	0	0	0	20103
AMC 75	80	54	GREY	M-8	0	0	0	20105
AMC 100	80	54	BEIGE	M-8	0	0	0	20107
AMC 125	80	54	WHITE	M-8	0	0	0	20300
Round rubber base	7	64	-	M-8	0	0	0	20109
Rectangular base	5	-	-	M-8	110	64,5	80	20110
Rectangular base+Sylomer®	15	-	-	M-8	110	65	80	20106

Vibrabsorber MEDIUM SERIES

ELASTICAL PROPERTIES

AMC FRECUENCIAS PROPIAS
MECANOCAUCHO Tipo Serie media

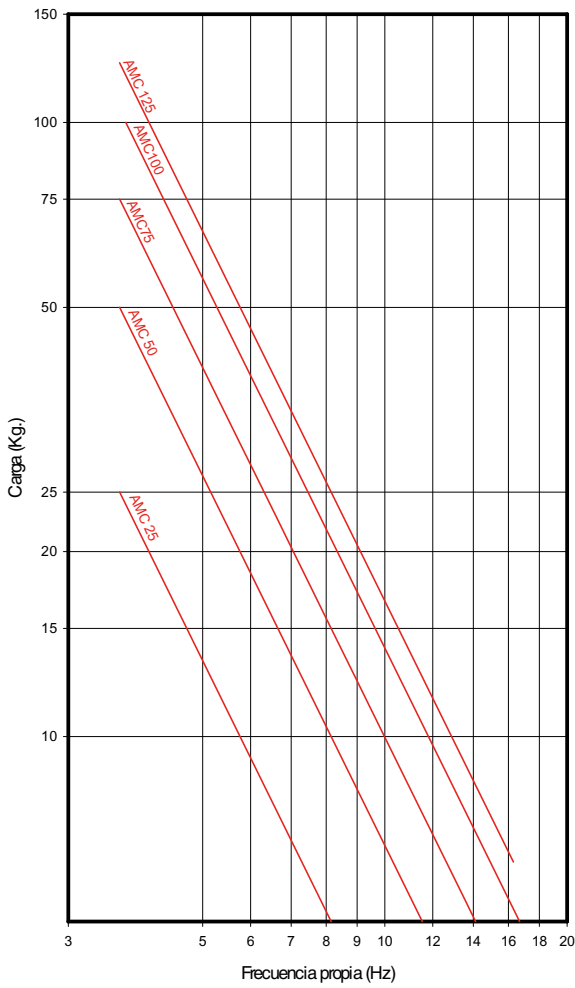

AMC CARGA DEFORMACION
MECANOCAUCHO Tipo Serie media

